

LED TRIPROOF LUMINAIRE

أوبتيمال لايت
Optimal Light



MODEL # OPT-TP XX



IK
08

100-277
Volt

100,000
Hrs.

IP
65

Watt	20-50 WATTS
Lumen	150 LUMEN/W
DALI /DIMMING/EMERGENCY	OPTIONAL
Voltage	220-240 /100-277 V
Life Hours	50,000 Hrs.
Material	POLYCARBONATE
Color Temperature	3000K 4000K 6500K
IP Rating	65

Application

Parking lot,
Shopping mall
Factory,
Airport, Warehouse,
Metro, Balcony
Schools- Hospitals



IECEE CE CB


RoHS
COMPLIANT



MODEL # OPT -OPT-TP-xx

PRODUCT SPECIFICATION


PRODUCT NAME	LED TRIPROOF LAMP
PRODCUCT CODE	OPT-TP-0.6/1.2/1.5
CLASSIFICATION	Class I
IP RATING	IP65
IK RATING	IK: 10
WATTAGE	20W 30W 40W 60W
CHIP TYPE	SMD2835
LUMEN OUTPUT	150 LUMEN /W
CRI:	CRI: >80
VOLTAGE	220-240 VOLT AC / 100-277 AC 50/60 Hz
POWER FACTOR	0.9
LIFE HOURS.	50,000 Hours- 100,000 Hrs.
DALI - OPTION	YES
COLOR TEMPERATURE	3CCT(3000k,4000k,6500k)
BODY :	Polycarbonate -Gray Body
DIFFUSER	Polycarbonate Milky Diffuser

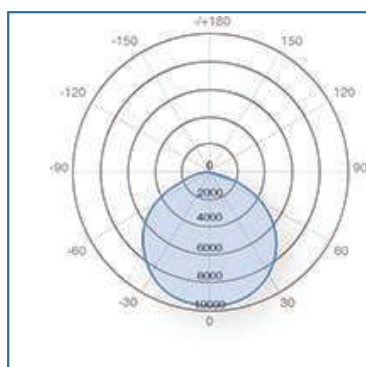

120°

- 1.MWS Sensor max 6m.
- 2.EM 2W 3H.


Dimension

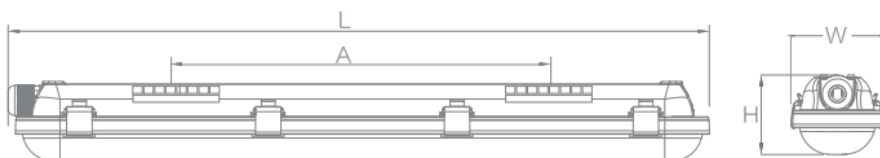

PRODUCT WATT	LENGTH (MM)	WIDTH (MM)	HEIGHT (MM)
45-60-80 W	1507	75	7
24 - 36- 24 W	1207	75	7
20 - 30 - 40 W	1207	75	7

MODEL # OPT -OPT-TP-12-48

Accessories

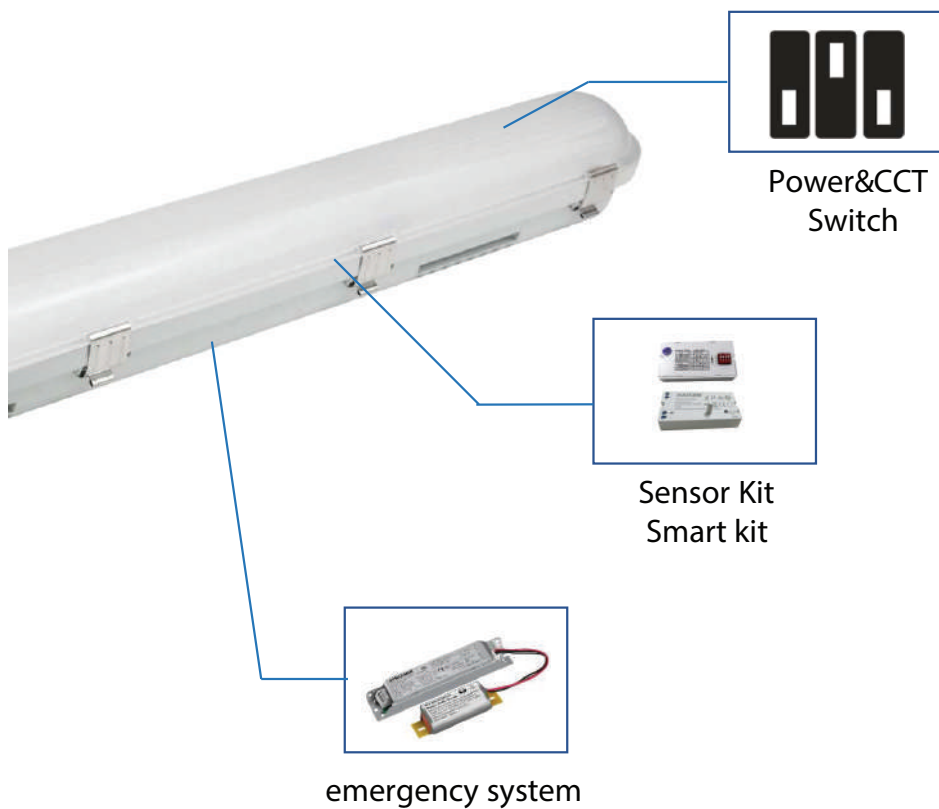

Installation



Rope Hanging



Surface mount